



The Classic design has the same footprints as the de facto industry standard 0.6" style I/O modules. They have a hold-down screw, and can be used in mounting boards where shock and vibration are present.


All modules are UL recognized, CSA certified and CE compliant.

The Classic package offers the following advantages:

- Includes hold-down screw
- Compatible with WRC's line of SmartMux and data acquisition cards
- UL, CSA and CE marks standard
- 5, 15 and 24 volt logic available
- Proven reliable circuitry

Several mounting boards are available with spare fuse, power-on LED and fuse test circuit.

Standard input modules

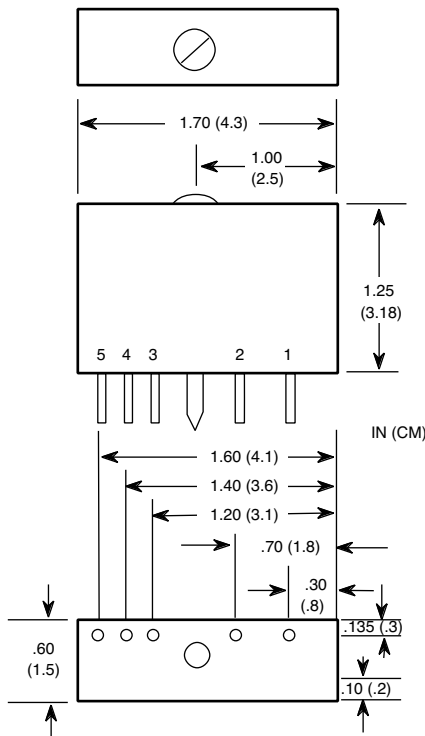

Standard output modules

