


The 1782-A16R mounting boards can be used with up to 16 1781-series slim modules, respectively. The terminal block accepts insulated wire with stripped ends or ferrules. Each power side point is individually isolated from each other. Channel-to-channel isolation is provided on the signal side, as well as the power side. The 1782-A16R is only available for DIN mounting on DIN rails such as WRC50022.

### MOUNTING DIMENSIONS



### SCHEMATIC DIAGRAM

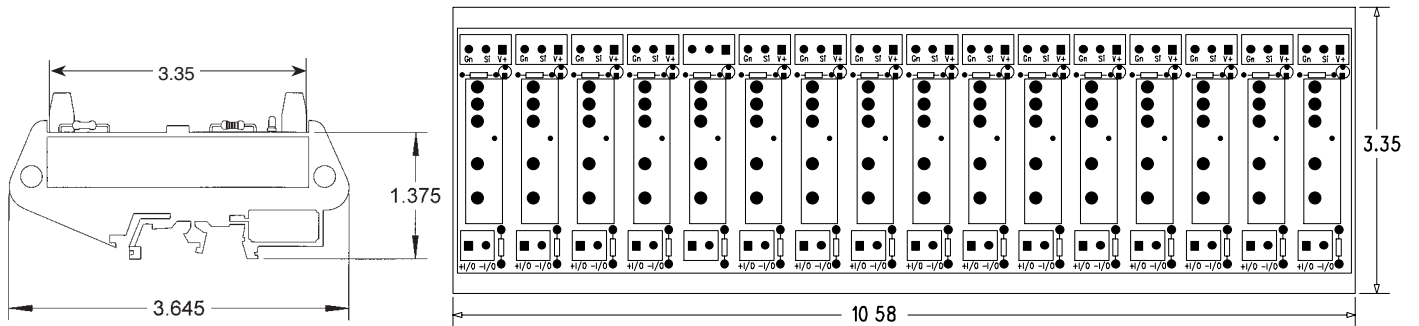